

PLAN VIEW

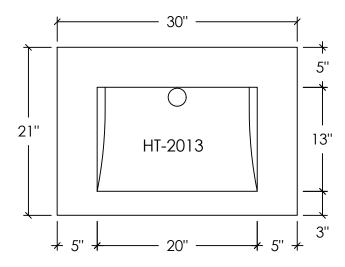


REAR ELEVATION

L BRACKET LOCATION RANGE (SEE BRACKET MOUNTING INSTRUCTIONS)

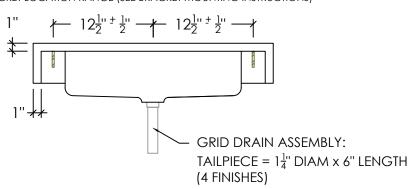

RIGHT SECTION

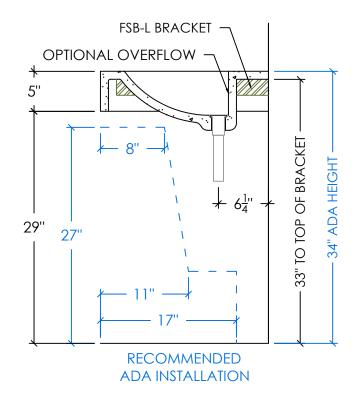

SPECIFICATIONS

SINK BASIN:

- SINK MODEL #: HT-2013 = 20" x 13" x 5 1/2"
- COMPLIANCE & CERTIFICATIONS:



CSA B45.8/IAPMO Z403 ASME A112.18.2/CSA B125.2 CODE = R-SL-1-1-30x18-(C)-(O)



ICC A117.1

STANDARD FAUCET & SOAP HOLE CONFIGURATIONS (CUSTOMIZABLE):

- 0 HOLES WALL-MOUNT FAUCET
- 1 SINGLE FAUCET HOLE OR TRIPLE HOLE SET CENTERED ON SINK BASIN
- SOAP HOLE 5" MINIMUM TO LEFT OR RIGHT OF FAUCET HOLE
- TRIPLE HOLE SET = 8" SPREAD
- HOLE DIAMETER = 1 3/8"
- HOLE(S) CENTERED 2 1/4" OFF OF BACK OF SINK BASIN
- OPTIONAL OVERFLOW ASSEMBLY (D-OK-125) CENTERED ON REAR BASIN WALL



30" ADA FLOATING CONCRETE HALF-TROUGH SINK

SKU: FLO-30C-ADA

SCALE: 1" = 12"

PAGE: 1 OF 1

All Designs © TRUEFORM CONCRETE, LLC All Rights Reserved. Not for Publication.

DATE: 10-18-22

DRAWN BY: DA